



## SOD-123FL Plastic-Encapsulate Diodes

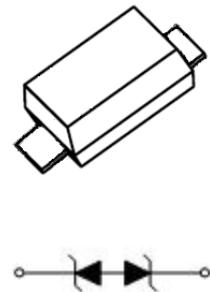
### **ESDSMF24CA Bi-direction Transient Voltage Suppressor**

#### **DESCRIPTION**

Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, high level of ESD protection makes them a flexible solution for applications such as Digital cameras, cellular phones, and MP3 Players. It is designed to replace multiplayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

**SOD-123FL**



#### **FEATURES**

- Bi-directional ESD protection of one line
- Reverse stand-off voltage: 24V
- Low reverse clamping voltage
- Low leakage current
- Excellent package: 2.80mm × 1.90mm × 1.10mm
- Peak pulse power: 300W (10/1000μs)
- Fast response time
- JESD22-A114-B ESD Rating of class 3B per human body model
- IEC 61000-4-2 Level 4 ESD protection
- Surge protection according to 10/1000μs waveform:  $I_{PPM}$  8A

#### **APPLICATIONS**

- Computers and peripherals
- Digital Cameras
- Audio and video equipment
- Cellular handsets and accessories
- Portable electronics
- Other electronics equipments communication systems

#### **MARKING**



XXXX = Internal Code

Front side

**MAXIMUM RATINGS (  $T_a=25^\circ\text{C}$  unless otherwise noted )**

Parameter	Symbol	Limit	Unit
IEC 61000-4-2 ESD Voltage	$V_{\text{ESD}}^{(1)}$	$\pm 30$	kV
Air Model		$\pm 30$	
Contact Model		$\pm 20$	
JESD22-A114-B ESD Voltage		$\pm 0.4$	
ESD Voltage	Machine Model		
Peak Pulse Power	$P_{\text{PP}}^{(2)}$	300	W
Peak Pulse Current	$I_{\text{PP}}^{(2)}$	8	A
Lead Solder Temperature – Maximum (10 Second Duration)	$T_L$	260	°C
Operation Junction and Storage Temperature Range	$T_J, T_{\text{stg}}$	-55 ~ +150	°C

(1).Device stressed with ten non-repetitive ESD pulses.

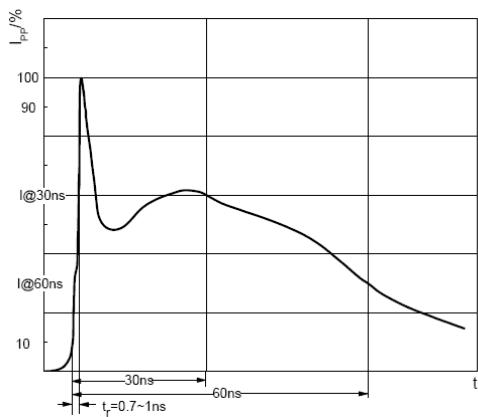
(2).Non-repetitive current pulse 10/1000μs waveform

**ESD standards compliance****IEC61000-4-2 Standard**

Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

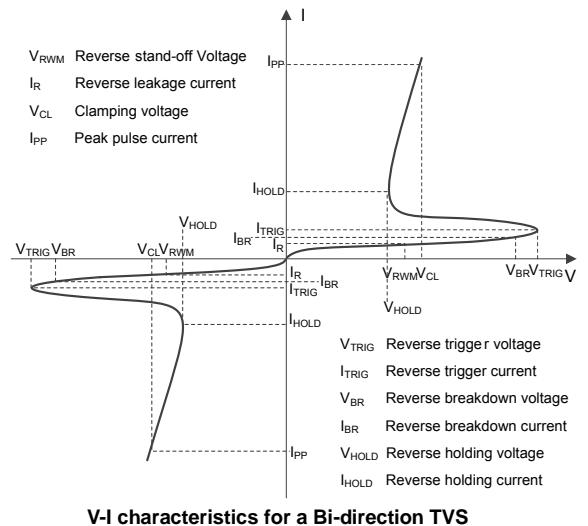
**JESD22-A114-B Standard**

ESD Class	Human Body Discharge V
0	0 ~ 249
1A	250 ~ 499
	500 ~ 999
	1000 ~ 1999
2	2000 ~ 3999
3A	4000 ~ 7999
	8000 ~ 15999

**ESD pulse waveform according to IEC61000-4-2**

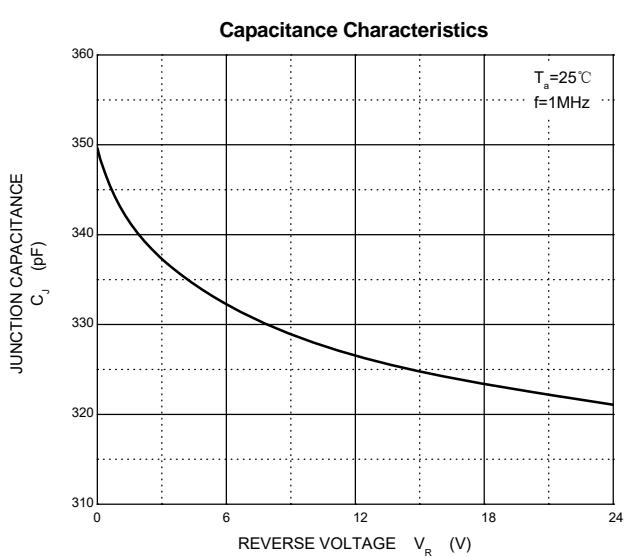
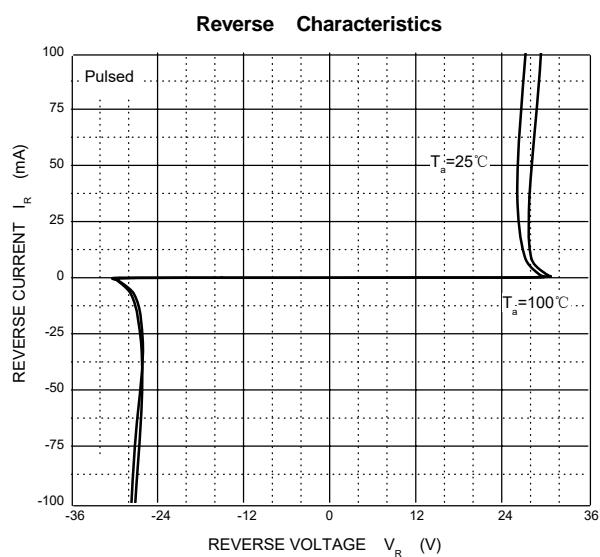
**ELECTRICAL PARAMETER**

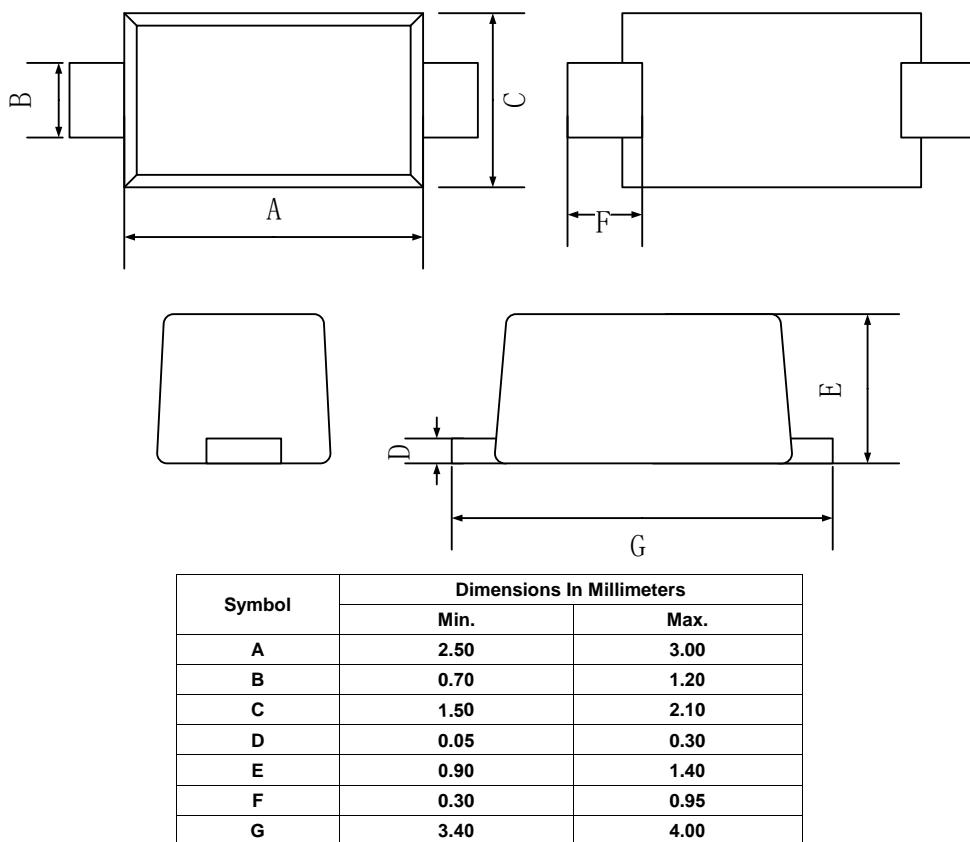
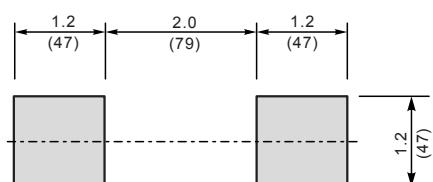
Symbol	Parameter
$V_{CL}$	Clamping Voltage @ IPP
$I_{PP}$	Peak Pulse Current
$V_{TRIG}$	Reverse trigger voltage
$I_{TRIG}$	Reverse trigger current
$V_{BR}$	Reverse breakdown Voltage
$I_{BR}$	Reverse breakdown current
$V_{RWM}$	Reverse Standoff Voltage
$I_R$	Reverse Leakage Current @ VRWM
$V_{HOLD}$	Reverse Holding Voltage
$I_{HOLD}$	Reverse Holding Current

**ELECTRICAL CHARACTERISTICS( $T_a=25^\circ C$  unless otherwise specified)**

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Reverse stand off voltage	$V_{RWM}$				24	V
Reverse leakage current	$I_R$	$V_{RWM}=12V$			1	$\mu A$
Breakdown voltage	$V_{(BR)}$	$I_T=1mA$	26.7		32	V
Clamping voltage	$V_C^{(1)}$	$I_{PP}=8A$			39	V
Junction capacitance	$C_J$	$V_R=0V, f=1MHz$			350	pF

(1).Non-repetitive current pulse 10/1000 $\mu s$  waveform

**TYPICAL CHARACTERISTICS**

**PACKAGE OUTLINE AND PAD LAYOUT INFORMATION****SOD-123FL Package Outline Dimensions****SOD-123FL Suggested Pad Layout****Note:**

1. Controlling dimension:in millimeters.
2. General tolerance: $\pm 0.05\text{mm}$ .
3. The pad layout is for reference purposes only.