




TO-220F Plastic-Encapsulate Transistors


TIP127F DARLINGTON TRANSISTOR (PNP)

FEATURES

- Medium Power Complementary Silicon Transistors

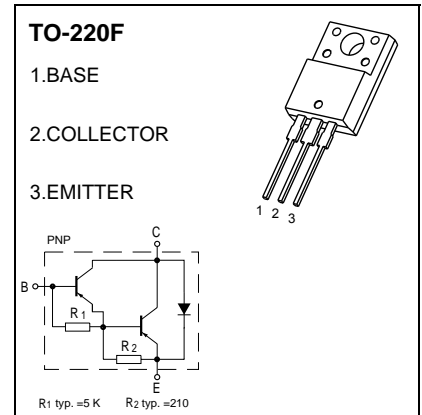

MARKING

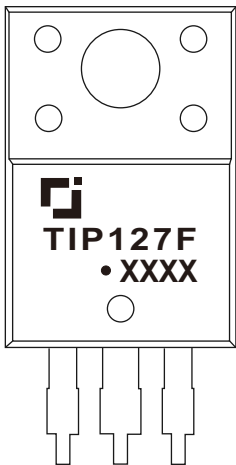

TIP127F=Device code
 Solid dot=Green moldinn compound device,
 if none,the normal device
 XXXX=Code








MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-100	V
V_{CEO}	Collector-Emitter Voltage	-100	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-5	A
P_C	Collector Power Dissipation	2	W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	62.5	$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.92	$^\circ\text{C}/\text{W}$
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	$^\circ\text{C}$


ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _C = -1mA, I _E =0	-100		V
Collector-emitter breakdown voltage	V _{CEO(SUS)}	I _C = -30mA, I _B =0	-100		V
Collector cut-off current	I _{CBO}	V _{CB} =-100V, I _E =0		-0.2	mA
Collector cut-off current	I _{CEO}	V _{CE} =-50 V, I _B =0		-0.5	mA
Emitter cut-off current	I _{EBO}	V _{EB} =-5 V, I _C =0		-2	mA
DC current gain	h _{FE(1)}	V _{CE} = -3V, I _C =-0.5A	1000		
	h _{FE(2)}	V _{CE} = -3V, I _C =-3 A	1000	12000	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =-3A, I _B =-12mA I _C =-5 A, I _B =-20mA		-2 -4	V
Base-emitter voltage	V _{BE}	V _{CE} = -3V, I _C =-3 A		-2.5	V
Output Capacitance	C _{ob}	V _{CB} =-10V, I _E =0, f=0.1MHz		300	pF

Typical Characteristics

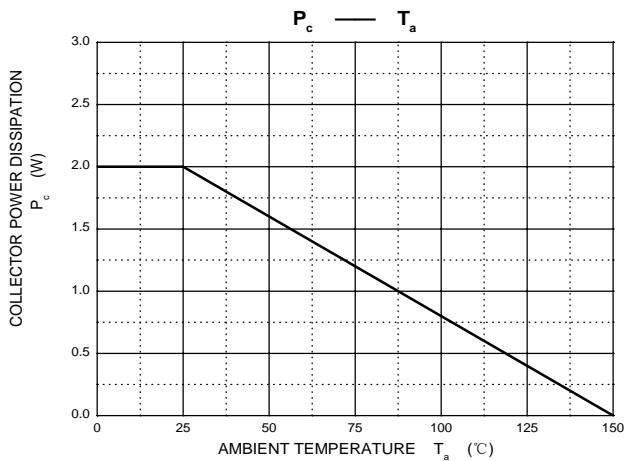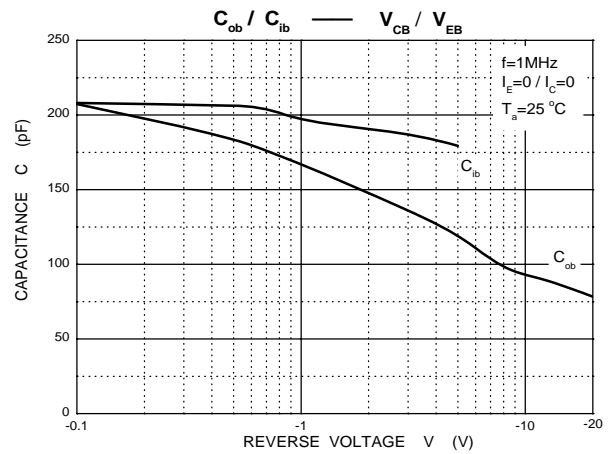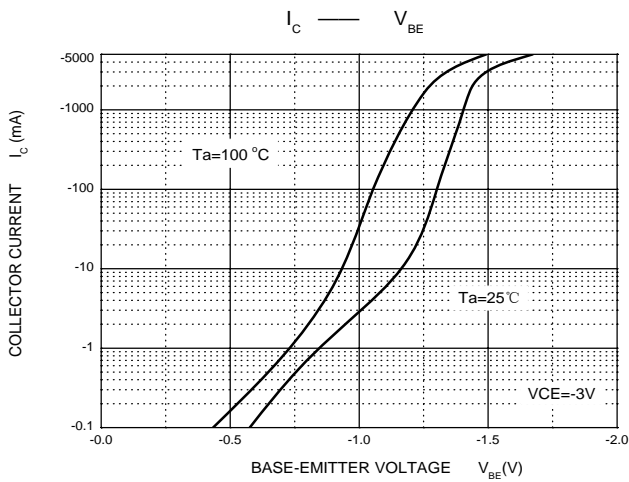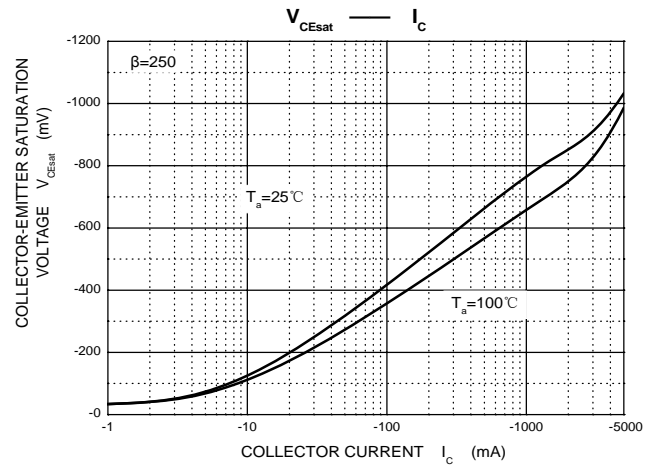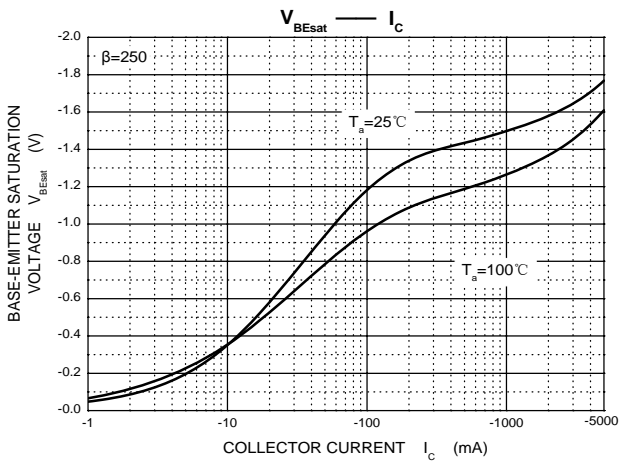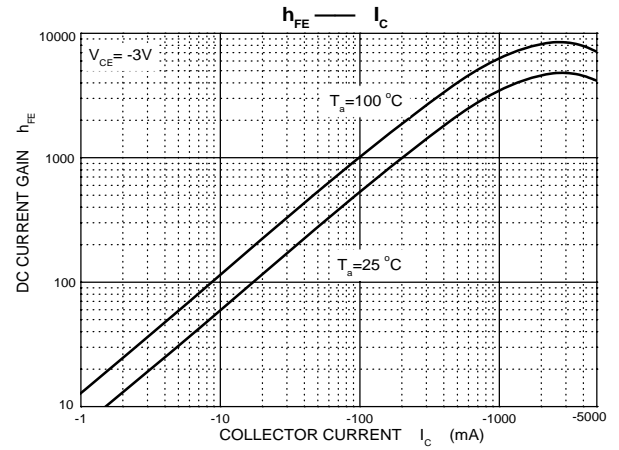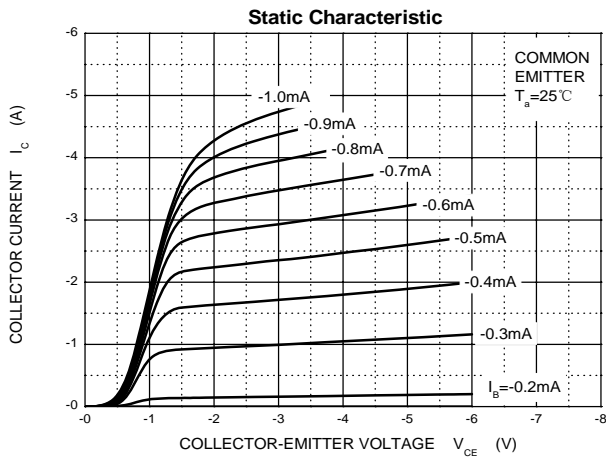

TO-220F Package Outline Dimensions

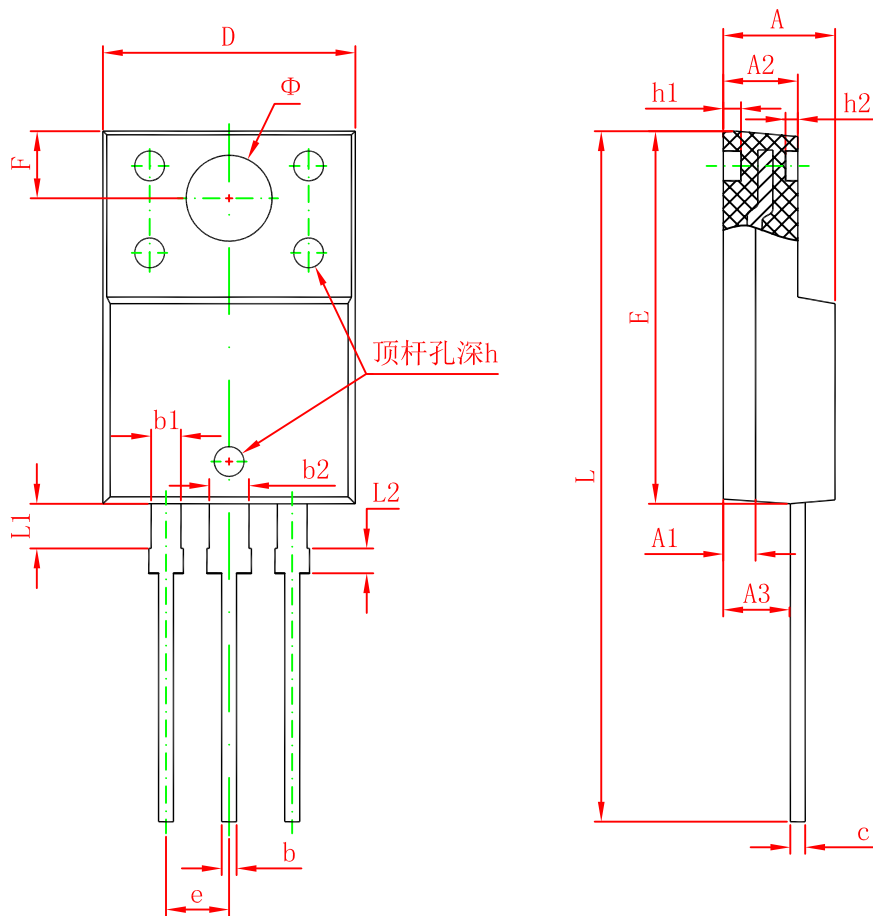

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.300	4.700	0.169	0.185
A1	1.300 REF.		0.051 REF.	
A2	2.800	3.200	0.110	0.126
A3	2.500	2.900	0.098	0.114
b	0.500	0.750	0.020	0.030
b1	1.100	1.350	0.043	0.053
b2	1.500	1.750	0.059	0.069
c	0.500	0.750	0.020	0.030
D	9.960	10.360	0.392	0.408
E	14.800	15.200	0.583	0.598
e	2.540 TYP.		0.100 TYP.	
F	2.700 REF.		0.106 REF.	
Φ	3.500 REF.		0.138 REF.	
h	0.000	0.300	0.000	0.012
h1	0.800 REF.		0.031 REF.	
h2	0.500 REF.		0.020 REF.	
L	28.000	28.400	1.102	1.118
L1	1.700	1.900	0.067	0.075
L2	0.900	1.100	0.035	0.043