




## TO-220-3L Plastic-Encapsulate Transistors


**TIP127** DARLINGTON TRANSISTOR (PNP)

### FEATURES

- Medium Power Complementary Silicon Transistors

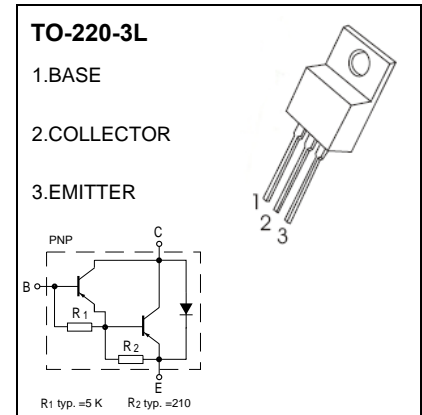

### MARKING

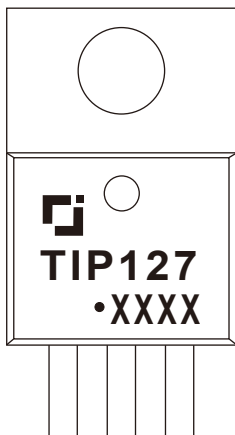

TIP127=Device code  
Solid dot=Green moldinn compound device,  
if none,the normal device  
XXXX=Code








### MAXIMUM RATINGS ( $T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage	-100	V
$V_{CEO}$	Collector-Emitter Voltage	-100	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current -Continuous	-5	A
$P_C$	Collector Power Dissipation	2	W
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient	62.5	$^{\circ}\text{C}/\text{W}$
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.92	$^{\circ}\text{C}/\text{W}$
$T_J, T_{stg}$	Operation Junction and Storage Temperature Range	-55~+150	$^{\circ}\text{C}$


**ELECTRICAL CHARACTERISTICS (T<sub>a</sub>=25°C unless otherwise specified)**

Parameter	Symbol	Test conditions	Min	Max	Unit
Collector-base breakdown voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = -1mA, I <sub>E</sub> =0	-100		V
Collector-emitter breakdown voltage	V <sub>CEO(SUS)</sub>	I <sub>C</sub> = -30mA, I <sub>B</sub> =0	-100		V
Collector cut-off current	I <sub>CBO</sub>	V <sub>CB</sub> =-100V, I <sub>E</sub> =0		-0.2	mA
Collector cut-off current	I <sub>CEO</sub>	V <sub>CE</sub> =-50 V, I <sub>B</sub> =0		-0.5	mA
Emitter cut-off current	I <sub>EBO</sub>	V <sub>EB</sub> =-5 V, I <sub>C</sub> =0		-2	mA
DC current gain	h <sub>FE(1)</sub>	V <sub>CE</sub> = -3V, I <sub>C</sub> =-0.5A	1000		
	h <sub>FE(2)</sub>	V <sub>CE</sub> = -3V, I <sub>C</sub> =-3 A	1000	12000	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> =-3A, I <sub>B</sub> =-12mA I <sub>C</sub> =-5 A, I <sub>B</sub> =-20mA		-2 -4	V
Base-emitter voltage	V <sub>BE</sub>	V <sub>CE</sub> = -3V, I <sub>C</sub> =-3 A		-2.5	V
Output Capacitance	C <sub>ob</sub>	V <sub>CB</sub> =-10V, I <sub>E</sub> =0, f=0.1MHz		300	pF

# Typical Characteristics

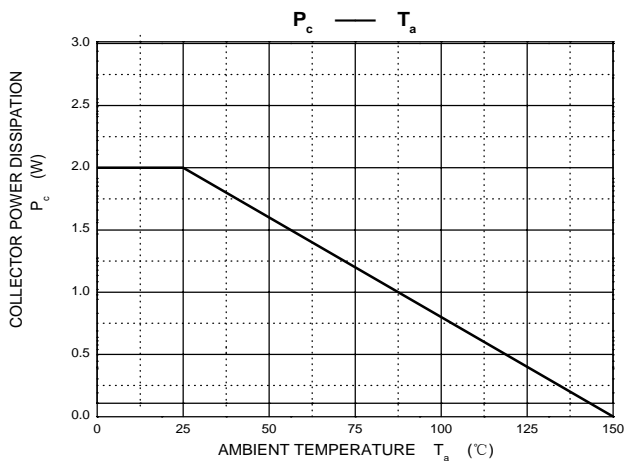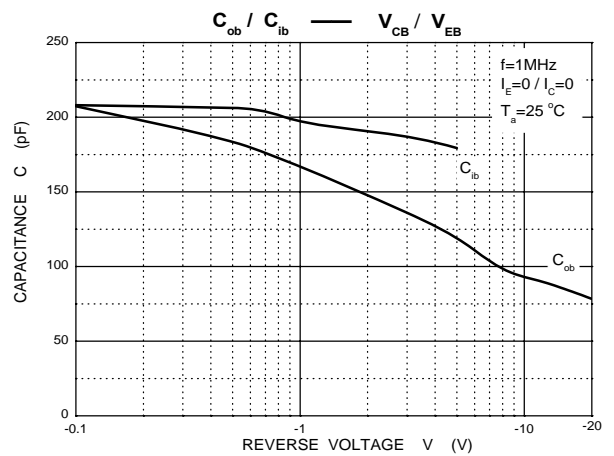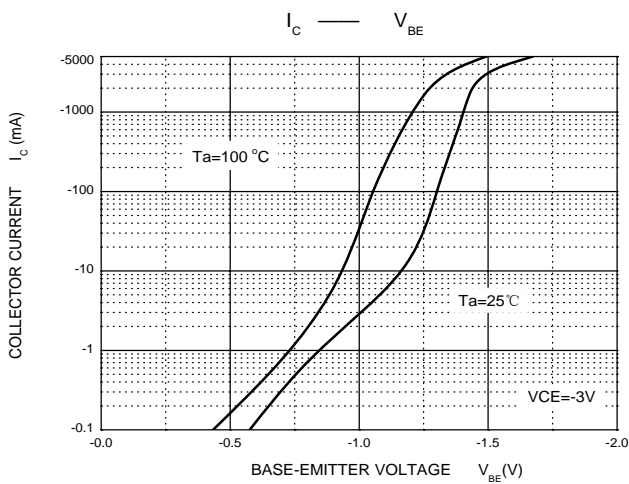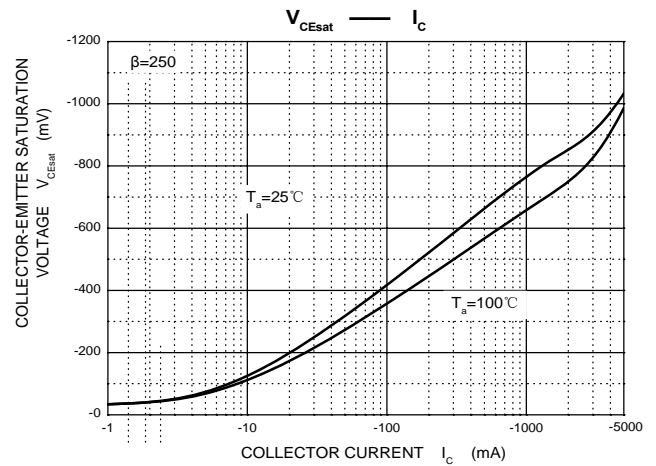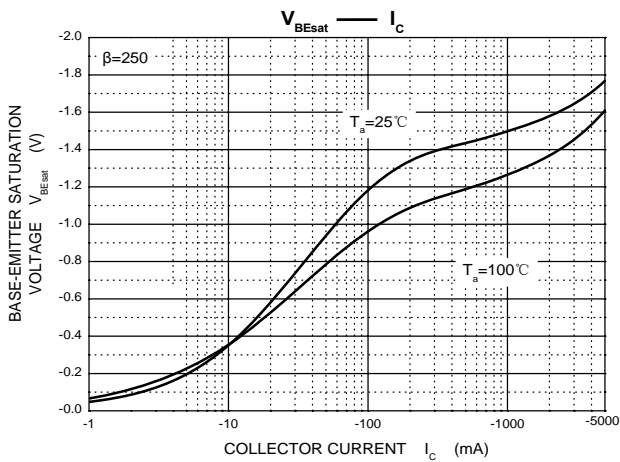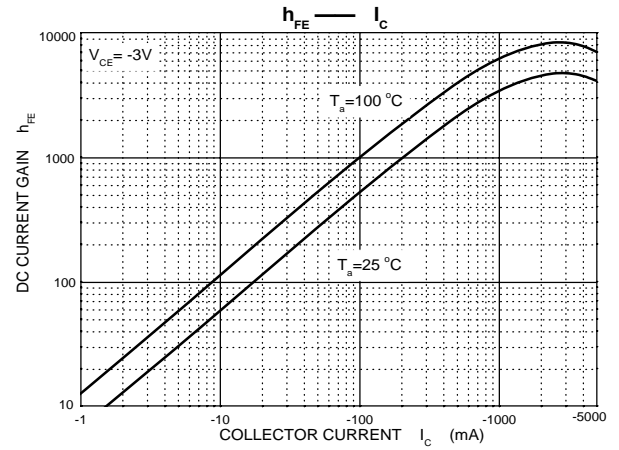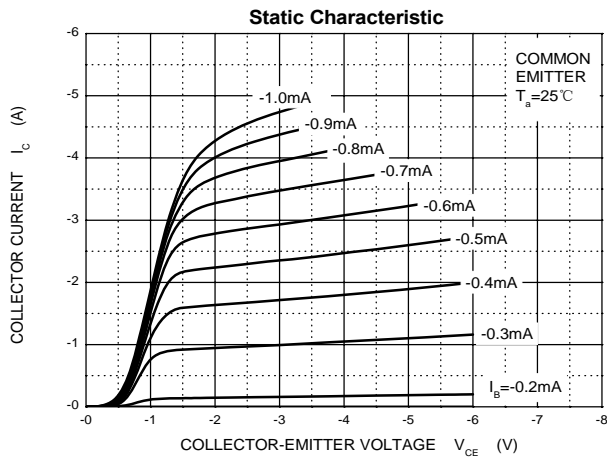

# TO-220-3L Package Outline Dimensions

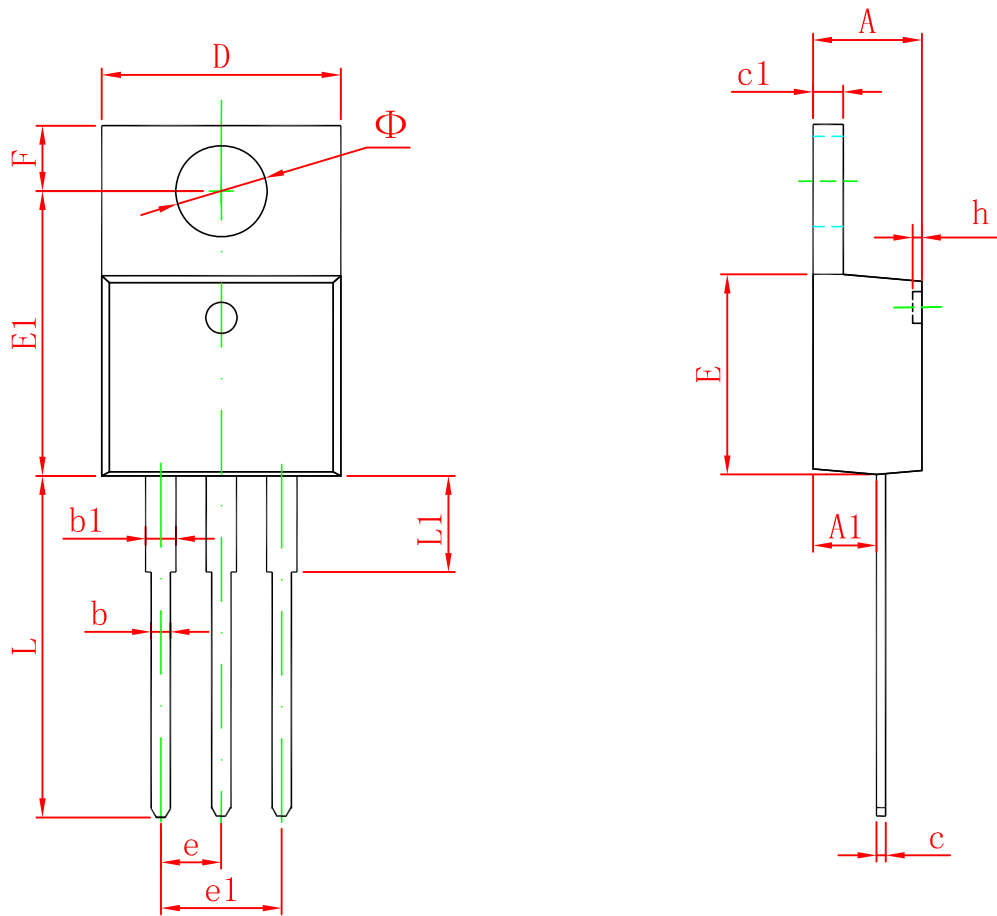

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	4.470	4.670	0.176	0.184
A1	2.520	2.820	0.099	0.111
b	0.710	0.910	0.028	0.036
b1	1.170	1.370	0.046	0.054
c	0.310	0.530	0.012	0.021
c1	1.170	1.370	0.046	0.054
D	10.010	10.310	0.394	0.406
E	8.500	8.900	0.335	0.350
E1	12.060	12.460	0.475	0.491
e	2.540 TYP		0.100 TYP	
e1	4.980	5.180	0.196	0.204
F	2.590	2.890	0.102	0.114
h	0.000	0.300	0.000	0.012
L	13.400	13.800	0.528	0.543
L1	3.560	3.960	0.140	0.156
$\Phi$	3.735	3.935	0.147	0.155